


- 165° F FUSIBLE LINK STANDARD
- 212° F AND 165° F REPLACEMENT LINKS AVAILABLE
- FACTORY INSTALLED ONLY
- USED ON 661 AND 682 REGISTERS
- SIZES LARGER THAN 18 X 18 REQUIRED TWO LINKS
- IMPORTANT: FUSIBLE LINK DAMPER ASSEMBLIES ARE NOT U.L. LISTED FIRE OR SMOKE DAMPERS

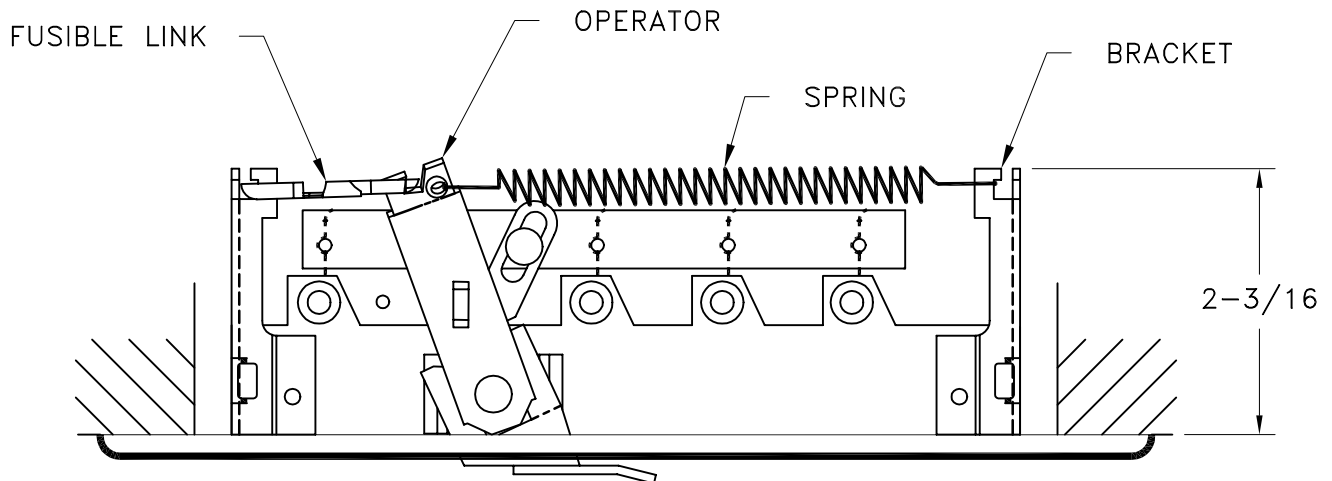

JOB NAME: _____	SUBMITTED BY: _____	DATE: 12/14/99	SD-9804
LOCATION: _____		STEEL, FUSIBLE LINK MULTI-SHUTTER VALVE	
ARCHITECT: _____			
ENGINEER: _____			
CONTRACTOR: _____			