




- EXTRUDED ALUMINUM CONSTRUCTION
- MINIMUM SIZE = 12 INCHES
- FOR USE IN 9/16" NARROW REGRESS T-BAR CEILING
- MULTIPLE SECTIONS KEYED FOR PROPER ALIGNMENT
- DIFFUSERS AVAILABLE WITH ONE TO TEN SLOTS, WITH OR WITHOUT PATTERN CONTROLLER
- FINISH: WHITE (W) ENAMEL OR SATIN ANODIZED (SA)

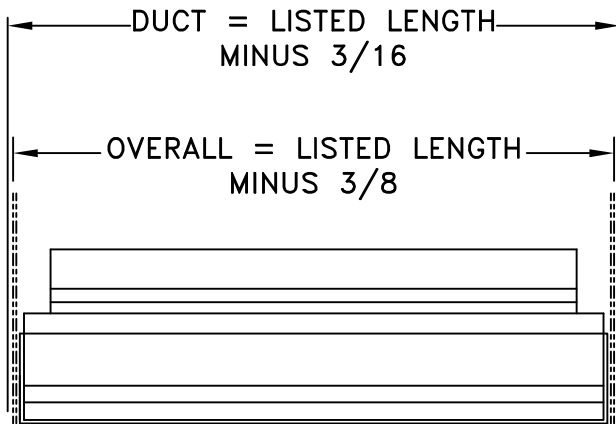


9/16" NARROW
REGRESS T-BAR CEILING
(ORDER WITH END CAPS)

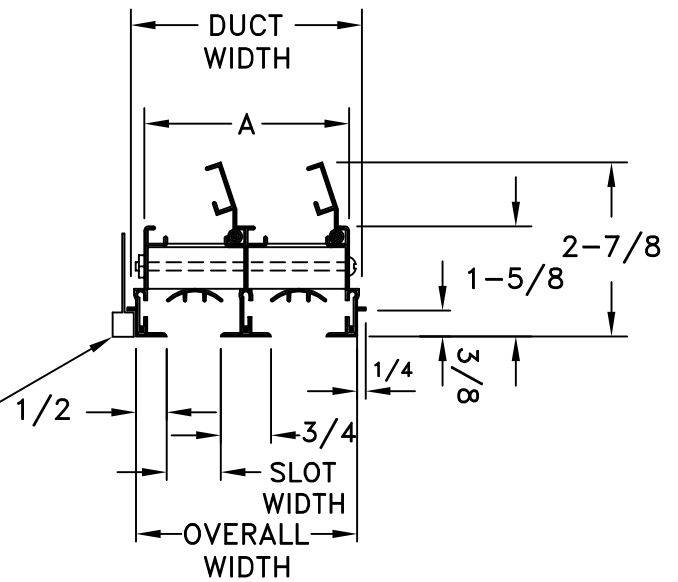


MARGIN ONLY



MARGIN AND
PATTERN
CONTROLLER



MARGIN
AND
DAMPER



MARGIN, DAMPER
AND PATTERN
CONTROLLER

SLOT WIDTH	TYPE	A	DUCT WIDTH	OVERALL WIDTH
1/2	50	1-1/4 X NO. OF SLOTS	A + 3/8	A + 1/4
3/4	75	1-1/2 X NO. OF SLOTS	A + 3/8	A + 1/4
1	10	1-3/4 X NO. OF SLOTS	A + 3/8	A + 1/4

JOB NAME: _____
 LOCATION: _____
 ARCHITECT: _____
 ENGINEER: _____
 CONTRACTOR: _____

SUBMITTED BY: _____

DATE: 01/15/08

SD-9625

S SERIES
 Slot Diffuser
 Margin LO-Narrow Regress
 T-Bar