

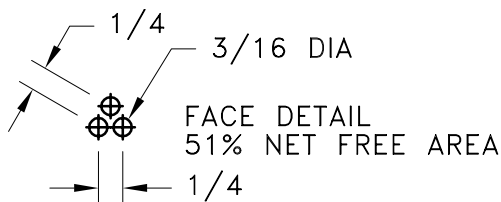
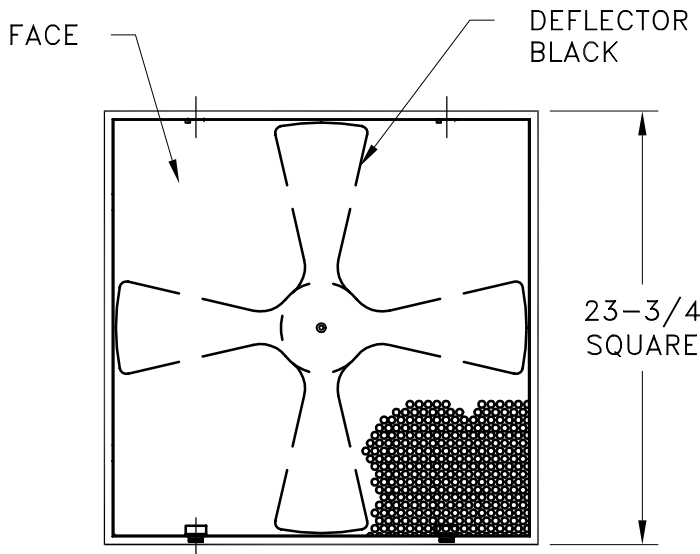



- FITS STANDARD 2' X 2' T-BAR CEILING SYSTEMS
- 5400 COLLARS AVAILABLE (6-14 INCH) IN TWO INCH INCREMENTS
- OPTIONAL ADJUSTABLE STEEL NO. 3800 BUTTERFLY DAMPER AVAILABLE FOR ALL SIZES
- HINGED/LATCHED FACE ALLOWS EASY ACCESS TO THE DEFLECTOR AND DAMPER
- ADJUSTABLE PATTERN DEFLECTOR
- PATENTED DEFLECTOR: U.S. PAT. NO. 4,815,934
- MATCHING RFPGR GRILLS AVAILABLE (SEE SD-9492)
- FINISH: WHITE (W) ENAMEL ON THE PERFORATED FACE
BLACK POLYESTER PAINT FINISH ON THE BACK PANEL

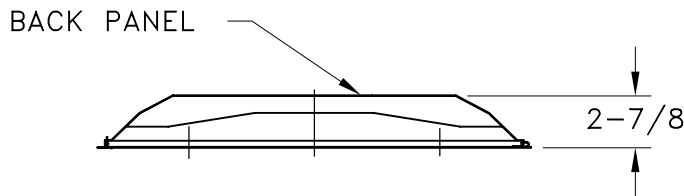


FLOW PATTERN OPTIONS



FULL (360°)




UNBALANCED





BALANCED


4 WAY



3 WAY



2 WAY CORNER



2 WAY

JOB NAME: _____	SUBMITTED BY: _____	DATE: 11/24/98	SD-9490
LOCATION: _____		RFPGR SUPPLY	
ARCHITECT: _____		Steel Removable Face	
ENGINEER: _____		Perforated Diffuser	
CONTRACTOR: _____			