
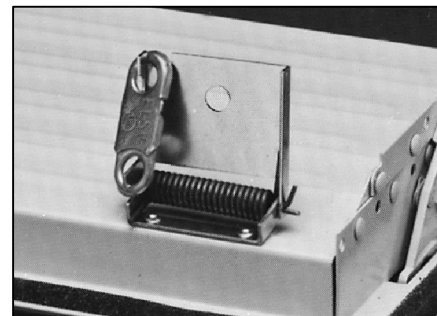
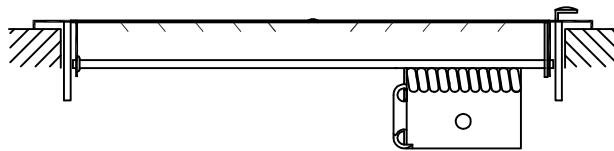
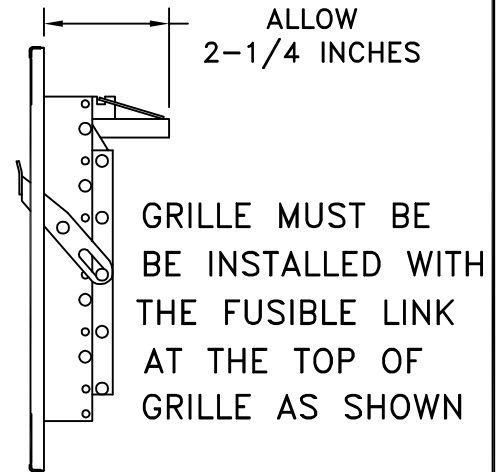


- 165° F UL LISTED FUSIBLE LINK STANDARD
- 212° F AND 165° F REPLACEMENT LINKS AVAILABLE
- FACTORY INSTALLED ONLY
- USED ON SELECT REGISTERS WITH METAL HANDLE MULTI-SHUTTER VALVES
- **IMPORTANT: FUSIBLE LINK DAMPER ASSEMBLIES ARE NOT U.L. LISTED FIRE OR SMOKE DAMPERS**

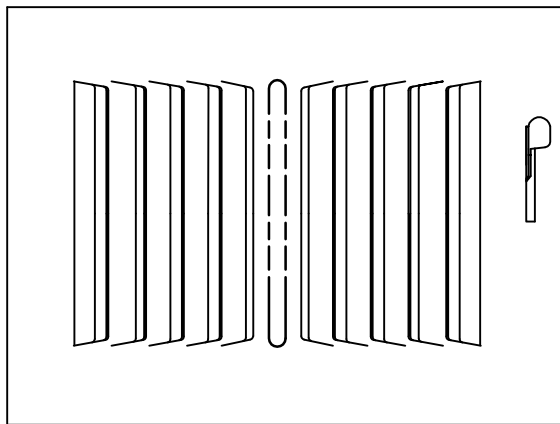

JOB NAME: _____	SUBMITTED BY: _____	DATE: 02/11/2014   SD-2800
LOCATION: _____		<b>STEEL, FUSIBLE LINK MULTI-SHUTTER VALVE</b>
ARCHITECT: _____		
ENGINEER: _____		
CONTRACTOR: _____		