


- MATERIALS: .012 ALUMINUM CONSTRUCTION FOR FLEXIBLE TUBE  
.018 G-90 GALVANIZED END FITTINGS
- FOR CONNECTING APPLIANCES TO TYPE B GAS VENT
- 1 INCH MINIMUM CLEARANCE TO COMBUSTIBLE CONSTRUCTION PER THE INSTALLATION INSTRUCTIONS
- 3, 4 AND 5 INCH DIAMETERS
- 1, 2, 3, 4 AND 5 FOOT LENGTHS

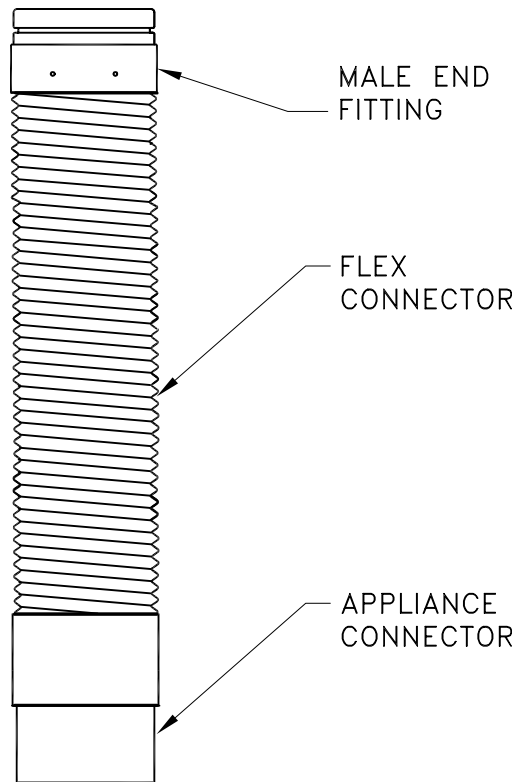

JOB NAME: _____	SUBMITTED BY: _____	DATE: 1/14/02	SD-3430
LOCATION: _____		<b>SFC</b> Single Wall Flexible Connector	
ARCHITECT: _____			
ENGINEER: _____			
CONTRACTOR: _____			

## SPECIFICATIONS FOR HART & COOLEY SINGLE WALL FLEXIBLE CONNECTOR SYSTEM

- TYPE: Flexible, corrugated, single-wall connector, round.
- APPLICATION: For connecting listed category I gas-fired appliances to Type B gas vents.
- SIZE: 3" through 5" diameter.
- LENGTHS: 1, 2, 3, 4 AND 5 foot lengths.
- TUBE MATERIAL: single layer of 3003 Aluminum .012" thick.
- END MATERIAL: .018 G-90 Galvanized Steel
- CLEARANCE TO COMBUSTIBLES: 1 inch air space clearance to combustible construction. It may not be enclosed nor pass through walls, floors or ceiling.
- UNDERWRITERS LABORATORIES LISTED: Per Standard UL 441(Latest Edition) File #MH13603

### CAUTION

- Flue gas temperature must never exceed 550°F in this connector. Do not use on any type of oil furnace or oil burner.

JOB NAME: _____ LOCATION: _____ ARCHITECT: _____ ENGINEER: _____ CONTRACTOR: _____	SUBMITTED BY: _____   	DATE: 8/6/02	SD-3435   <h3 style="text-align: center; margin: 0;">Specifications For SFC - Single Wall Flexible Connector System</h3>
--	---------------------------------	--------------	---