

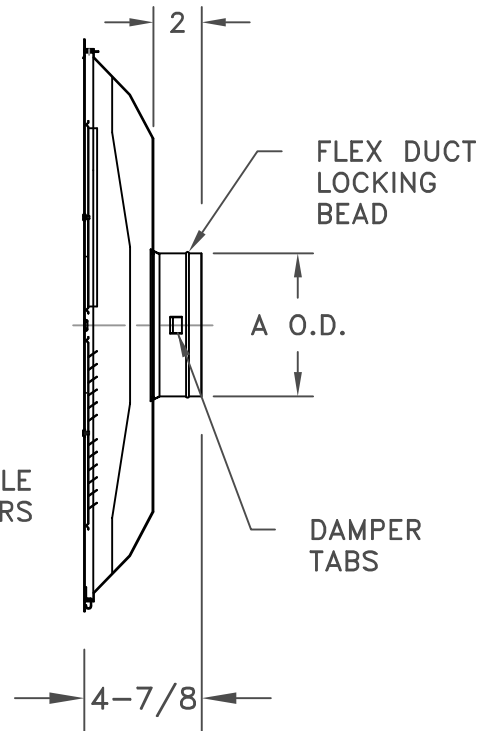


- ALL STEEL CONSTRUCTION
- FITS STANDARD 2' x 2' T-BAR CEILING SYSTEMS
- AVAILABLE IN 6 - 14 INCH COLLAR SIZES
- FACE MOUNTED ADJUSTABLE DEFLECTORS
- HINGED/LATCHED FACE ALLOWS FOR EASY ACCESS TO DEFLECTORS AND DAMPER
- OPTIONAL ADJUSTABLE NO.3800 STEEL BUTTERFLY DAMPER AVAILABLE FOR ALL SIZES
- IT IS RECOMMENDED THAT DIFFUSERS INSTALLED IN GRID CEILINGS BE SUPPORTED INDEPENDENT OF THE CEILING HARDWARE.
- FINISH: WHITE (W) ENAMEL ON FACE AND BACK

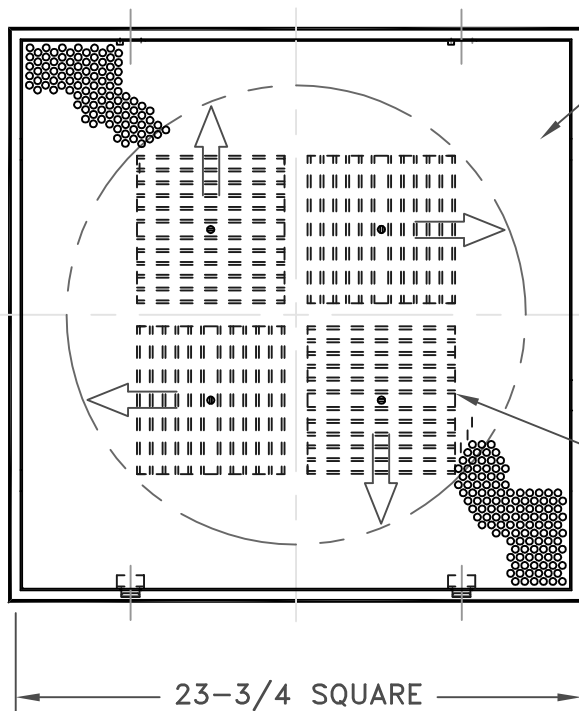

FACE DETAIL

PERFORATED - $\frac{3}{16}$ INCH HOLES
ON $\frac{1}{4}$ INCH
STAGGERED CENTERS,
51% FREE AREA



SIZE	A O.D.
6	$5\text{-}\frac{7}{8}$
8	$7\text{-}\frac{7}{8}$
10	$9\text{-}\frac{7}{8}$
12	$11\text{-}\frac{7}{8}$
14	$13\text{-}\frac{7}{8}$

JOB NAME: _____
 LOCATION: _____
 ARCHITECT: _____
 ENGINEER: _____
 CONTRACTOR: _____

SUBMITTED BY: _____

DATE: 08/05/2013 | SD-9499

SBP
 Steel Removable Face
 Perforated Diffuser